

Free-Standing SEWPAC Vertical GRP (above ground)

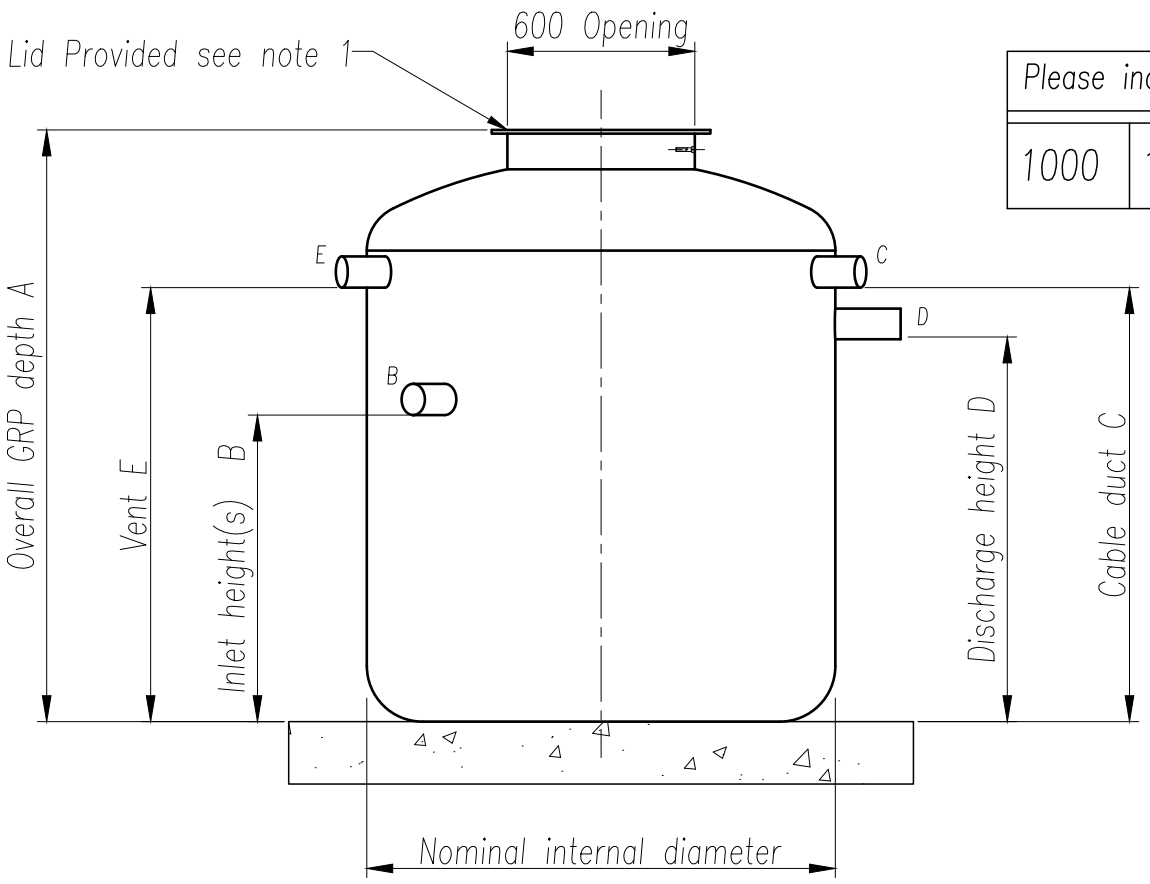

Please indicate nominal internal sump dia.				
1000	1200	1500	1800	2500

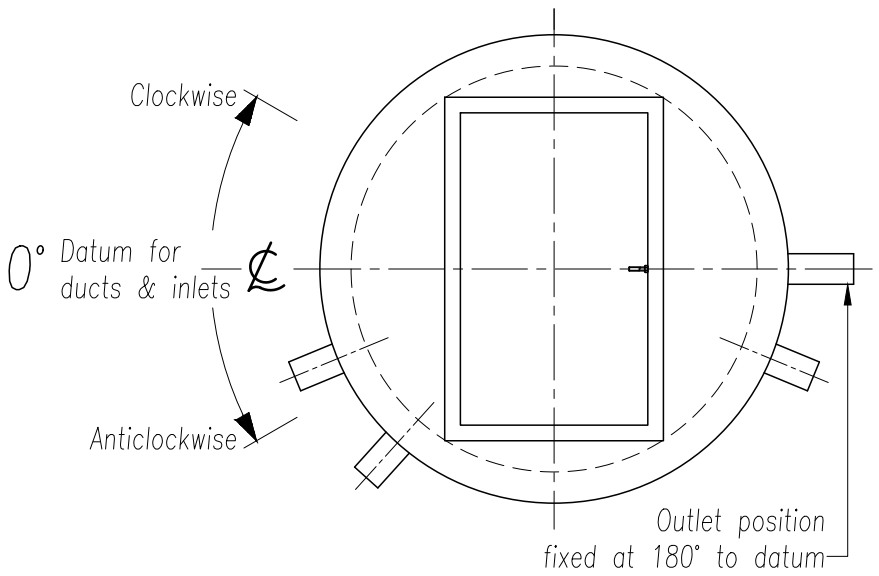

NOTES:
1. GRP lid is supplied
2. The tank diameter is the nominal internal diameter.
3. Cable duct and sewer inlets may be positioned around the tank to suit clients reasonable requirements. Where the required position coincides with structural detail, it will be placed in the nearest lower and/or highest adjacent position.
4. Final connection to discharge pipework is by others.

Item	Dim.	Invert depth mm	Stub pipe diameter	Degrees from datum	
				Clockwise	Anticlockwise
Well depth	A		N/A	N/A	N/A
Inlets	B1				
	B2				
	B3				
	B4				
	B5				
Cable Duct	C		100nb Minimum		
Outlet	D			Fixed at 180° (see plan)	
Vent	E				

Tank manufactured to tolerance of ±10mm on all dimensions

Project Ref. .

Pump Chamber Ref. .

NEW HADEN PUMPS
PUMPING SOLUTIONS

www.nhpumps.com

1000mm to 2500mm diameter Free-Standing SEWPAC Vertical GRP (above ground)

Drawing to be altered only by NHP

ALL DIMENSIONS IN mm
DO NOT SCALE – IF IN DOUBT ASK

NHP Ref. .

Drg. status Request for information

Drg.No. MD1-u

This is the property of New Haden Pumps Ltd. and must not be passed on to any person not authorised by New Haden Pumps Ltd. or be copied or otherwise utilized by anybody without New Haden Pumps Ltd. expressed written permission.

©